
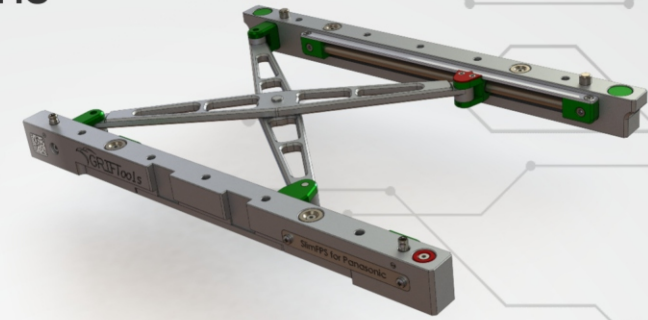


FPS Technical Specifications

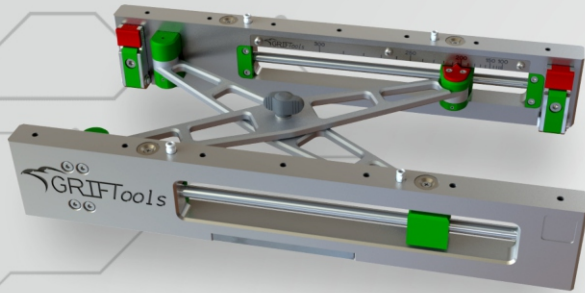

Part Number	FPS - Dn587	FPS - En642
Compatibility	DEK	EKRA
Material Spec	EN Aw7075	EN Aw7075
Surface	Hard Anodised	Hard Anodised
Tower Height	58.7mm +0 / -0.02mm	64.2mm +0 / -0.02mm
Toolplate Thickness	22.3mm +0 / - 0.03mm	22.3mm +0 / - 0.03mm
PCB Bottom Ref. Height	81mm	86.5mm
Applicable PCB Size min (L/W)	100mm / 100mm	100mm / 100mm
Applicable PCB Size max (L/W)	550mm / 450mm	550mm / 450mm
Applicable PCB thickness	0.8mm to 10mm	0.8mm to 10mm
Vacuum Option	Yes	Yes
Weight	2.3kg	2.5kg

Part Number	FPS - Ms265	FPS - Ps285
Compatibility	MPM (Accela / Momentum)	Panasonic (SPG / Sp series)
Material Spec	EN Aw7075	EN Aw7075
Surface	Hard Anodised	Hard Anodised
Tower Height	26.5mm +0 / -0.02mm	28.5mm +0 / -0.02mm
Toolplate Thickness	12.5mm +0 / - 0.03mm	12.5mm +0 / - 0.03mm
PCB Bottom Ref. Height	39mm	41mm
Applicable PCB Size min (L/W)	100mm / 100mm	100mm / 100mm
Applicable PCB Size max (L/W)	550mm / 450mm	550mm / 450mm
Applicable PCB thickness	0.8mm to 10mm	0.8mm to 10mm
Vacuum Option	TBD	TBD
Weight	1.3kg	1.45kg

■ Available For Other Printers. Please Contact Us.

■ Available For Other Printers. Please Contact Us.

■ Immediate Quotes

■ Safe Online Data Transfer for Advanced Communication

